

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11) EP 0 806 350 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

12.11.1997 Bulletin 1997/46

(51) Int. Cl.⁶: B65B 19/22, B65B 11/30

(21) Application number: 97107370.5

(22) Date of filing: 05.05.1997

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: 06.05.1996 IT BO960239

(71) Applicant:
G.D. SOCIETA' PER AZIONI
I-40100 Bologna (IT)

(72) Inventors:

- Manservigi, Alberto
40100 Bologna (IT)
- Draghetti, Fiorenzo
40059 Medicina (IT)


(74) Representative:

Jorio, Paolo et al
STUDIO TORTA S.r.l.,
Via Viotti, 9
10121 Torino (IT)

(54) Product manipulating method

(57) A method of manipulating products (6), each of which is transferred twice between a first (4) and a second (5) seat facing, parallel to, and opposite each other, to perform an operation on the product (6) at each trans-

fer; the two operations permitting, for example, the formation of a tubular wrapping (35) about the product (6).

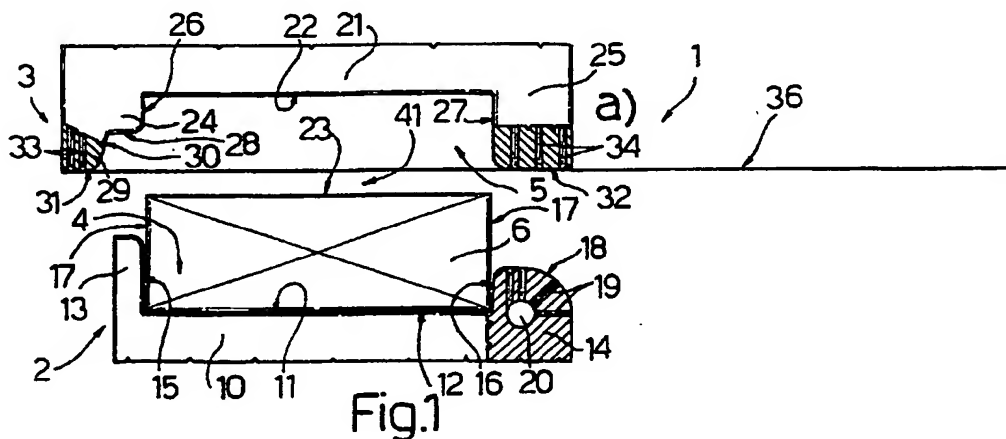

EP 0 806 350 A1

Description

The present invention relates to a product manipulating method.

The present invention may be used to advantage in the tobacco industry, in particular for manipulating packets or cartons of cigarettes, to which the following description refers purely by way of example.

In general, operations are performed on packets of cigarettes as they are transferred between two corresponding seats of two conveyors movable along a common path. In European Patent Application n.509,293, for example, a sheet of wrapping material is inserted between a first and second seat facing each other and traveling at the same speed along a common path; the first seat is so formed as to at least partly receive a packet; and the second seat is so formed as to receive the packet and the sheet, which is folded into a U about the packet as the packet and sheet are inserted at least partly inside the second seat by moving the two seats towards each other, and possibly with the aid of pushers and counter-pushers.

Upon the first and second seats being parted so that the packet is retained by the second seat, the portion of the sheet projecting from the second seat is folded onto the packet by fixed folding members and by movable folding members normally pivoting on the first or second seat.

While affording the advantage of performing a sequence of operations during transfer of the product, the above solution involves several drawbacks on account of the folding members and respective actuating devices seriously complicating the structure of the seats, which are therefore difficult and expensive to produce.

Moreover, in view of the fact that the first and second seats form part of respective conveyors and, in addition to cooperating with each other to fold the wrapping material, also feed the packet at high speed along a given path, the folding members and respective actuating devices may impair the reliability of the conveyors.

Finally, by requiring that each packet be transferred from one conveyor to a follow-up conveyor for each operation performed on the packet, the above known solution necessarily requires the use of a number of cascade conveyors for performing a number of operations on each packet.

It is an object of the present invention to provide a manipulating method designed to overcome the aforementioned drawbacks.

According to the present invention, there is provided a method of manipulating products, the method comprising the steps of supporting a product by means of a first seat facing and parallel to a second seat, the two seats being set to a parted position; moving the two seats, in a first given direction, in relation to and towards each other into a mating position to transfer the product from the first to the second seat and, at the same time, perform a first operation on the product; retaining the

product in the second seat; and moving the two seats in relation to each other so as to move the first seat away from the second seat and restore the two seats to the parted position; characterized by comprising the further step of moving the two seats in relation to each other and back into the mating position, so that the product is engaged by the first seat, to perform a second operation on the product.

The above method preferably comprises the further steps of transferring the product from the second to the first seat when the two seats are once more in the mating position; retaining the product inside the first seat; and moving the two seats back into the parted position.

Moreover, said two seats are preferably moved in a second direction, substantially perpendicular to said first direction, and along a substantially common path in the course of said relative displacements of the two seats and said two operations.

According to a preferred embodiment of the above method, said first and said second operation involve mating the product with at least one sheet element.

A non-limiting embodiment of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a schematic side view, with parts in section and parts removed for clarity, of a manipulating unit implementing the method according to the present invention and in a first operating position;

Figures 2 to 7 show the same view as in Figure 1 of the Figure 1 unit in further operating positions;

Figure 8 shows a schematic side view of a conveying device comprising a number of manipulating units as shown in Figures 1 to 7;

Figures 9 to 11 show the same view as in Figure 1 of the Figure 1 unit in three positions of a further operating sequence.

Number 1 in Figures 1 to 7 indicates a manipulating unit comprising at least a pair of pockets 2 and 3 defining respective seats 4 and 5 with their concavities facing each other, and each for partly receiving a product comprising, in the example shown, a packet 6 of cigarettes. By means of known actuating members (not shown), pockets 2 and 3 are movable, in relation to each other and in a direction 7, to and from a mating position (Figure 2) in which seats 4 and 5 define a chamber 8 having a section similar in shape to but no smaller than an end surface 9 of packet 6.

Pocket 2 is substantially U-shaped with its concavity facing pocket 3, and comprises a bottom wall 10 having a surface 11 perpendicular to direction 7 and forming the bottom surface of seat 4 for supporting a large lateral surface 12 of packet 6. Pocket 2 also comprises two wings 13 and 14 extending parallel to direction 7 from wall 10 towards pocket 3, and having respective facing surfaces 15 and 16 defining the lateral surfaces of seat 4 for laterally supporting respective

small lateral surfaces 17 of packet 6. More specifically, the length, measured in direction 7, of surfaces 15 and 16 is less than the width of respective surfaces 17, so that packet 6, when housed inside seat 4, projects partly outwards of seat 4.

Pocket 2 also comprises known mechanical and/or pneumatic devices (not shown) for releasably retaining packet 6 inside seat 4 and contacting surface 11.

Wing 14, measured in direction 7, is shorter than wing 13, and has a free end defined by a curved surface 18 at which open out a number of suction channels 19 extending substantially radially outwards from a suction header 20 formed through wing 14, crosswise to direction 7 and parallel to surfaces 11 and 16.

Like pocket 2, pocket 3 is substantially U-shaped with its concavity facing pocket 2, and comprises a bottom wall 21 having a surface 22 parallel to and facing surface 11 and forming the bottom surface of seat 5 for supporting a large lateral surface 23 of packet 6 parallel to surface 12. Pocket 3 also comprises two wings 24 and 25 extending parallel to direction 7 from wall 21 towards pocket 2, and having respective facing surfaces 26 and 27 defining the lateral surfaces of seat 5 for laterally supporting respective small lateral surfaces 17 of packet 6. More specifically, the length, measured in direction 7, of surfaces 26 and 27 is less than the width of respective surfaces 17 and is substantially complementary to the length of corresponding surfaces 15 and 16.

Like pocket 2, pocket 3 also comprises known mechanical and/or pneumatic devices (not shown) for releasably retaining packet 6 inside seat 5 and contacting surface 22.

Wing 24, measured in direction 7, is shorter than wing 25, and has a free end defined by a substantially flat surface 28, from the outer end of which a rib 29 projects towards pocket 2 and defines, with surface 28, a recess 30, which is engaged by the end of wing 13 when pockets 2 and 3 are set to the mating position. Rib 29 and wing 25 are defined on their free ends by respective surfaces 31 and 32, which are coplanar with each other and parallel to surface 22, and comprise respective suction holes 33 and 34 connected in known manner to a known suction device (not shown).

Figures 1 to 7 show how unit 1 is used to form, about packet 6, a tubular wrapping 35 (Figure 6b) commencing with a flat sheet 36 of overwrapping material.

As shown in Figure 1, to begin with, pockets 2 and 3 are set to the parted position facing each other; packet 6 is housed inside seat 4; and, by means of suction through holes 33 and 34, sheet 36 is retained extended in front of the opening of seat 5.

Subsequently (Figure 2), pockets 2 and 3 are moved in relation to each other and in direction 7 into the mating position, in which surface 18 of wing 14 substantially contacts surface 32 of wing 25 with sheet 36 in between, and an end portion of wing 13 engages recess 30 to define chamber 8 housing packet 6. In the course of the above movement into the mating position, the

portion of packet 6 projecting outwards of seat 4 is inserted inside seat 5 to fold sheet 36 into a U, so that an end portion 37 of the sheet, of a length greater than half the thickness of packet 6 and substantially equal to that of wing 24, contacts respective surface 17; a first portion 38 contacts surface 22; a second portion 39 contacts surface 27; and a third portion 40 extends outwards of chamber 8, between surfaces 18 and 32.

Subsequently (Figure 3), the pockets are separated in direction 7 back into the parted position shown in Figure 1, and packet 6 is released from seat 4 of pocket 2 and retained inside seat 5 of pocket 3.

During this movement, the suction through holes 34 is cut off, and suction through channels 19 is activated so that portion 40 slides in contact with surface 18 into a position substantially parallel to direction 7 and crosswise to a channel 41 defined between pockets 2 and 3 in the parted position.

As shown in Figures 3 and 4, unit 1 comprises a folding device 42 located along channel 41, and which, following relative displacement of pockets 2 and 3 and of folding device 42 itself in a direction 43 crosswise to direction 7, folds portion 40 squarely on to surface 12 of packet 6, with an end portion 44 (Figures 4 and 5) projecting from surface 12 and facing surface 31 of rib 29.

Subsequently, pockets 2 and 3 are moved back into the mating position (Figure 6) so as to fold portion 44 squarely and overlap portion 37 to complete wrapping 35, and are then moved back into the parted position. Prior to the latter movement, packet 6 and wrapping 35 are released by pocket 3 and retained inside pocket 2, so that, at the end of the manipulating operation (in this case, the formation of wrapping 35), packet 6 is restored to its original position, at the start of the manipulating operation, inside seat 4.

The practical embodiment shown in Figure 8 features a succession of pockets 2 and a succession of pockets 3 fitted to respective wheels 45 and 46 of a conveying device indicated as a whole by 47. Wheels 45 and 46 rotate in opposite directions about respective parallel axes 48 and 49 to feed pockets 2 and 3 along respective annular paths P1 and P2. More specifically, path P2 is a circular path, and wheel 45 is so formed as to move pockets 2 in known manner in direction 7 to deform path P1 and permit each packet 2 to travel along a path P3, common to paths P1 and P2, in time with a respective pocket 3 and in direction 43.

In the practical embodiment shown in Figure 8, wheel 45 is tangent to a loading conveyor 50 at a loading station 52 where packets 6 are loaded into seats 4, and to an unloading conveyor 51 at an unloading station 53 where packets 6 are unloaded from seats 4. Stations 52 and 53 are located along path P1 on either side of path P3, and, upstream from path P3 in direction 43, path P2 extends through a loading station 54 where sheets 36 are loaded onto pockets 3.

Each pair of corresponding pockets 2 and 3 defines a manipulating unit 1 for manipulating a respective packet 6, as described above, as it travels along path P3




in direction 43, and by moving pocket 2 in relation to respective pocket 3 in direction 7. In the Figure 8 embodiment, folding device 42 is obviously located in a fixed position along path P3.

As will be obvious from the above description relative to Figures 1 to 7, two successive operations - in this case, folding operations - are performed on packet 6 with no need for movable tools on pockets 2 and 3, as packet 6 is transferred from seat 4 to seat 5 and back again to seat 4.

As shown in Figures 9 to 11, the movements of pockets 2 and 3 in direction 7 may be exploited for performing different operations, such as applying to surfaces 12 and 23 of packet 6 two labels 55 and 56 fed onto and retained on surfaces 22 and 11 at the two steps in which pockets 2 and 3 are set to the parted position.

Claims

1. A method of manipulating products (2), the method comprising the steps of supporting a product (6) by means of a first seat (4) facing and parallel to a second seat (5), the two seats (4, 5) being set to a parted position; moving the two seats (4, 5), in a first given direction (7), in relation to and towards each other into a mating position to transfer the product (6) from the first (4) to the second (5) seat and, at the same time, perform a first operation on the product (6); retaining the product (6) in the second seat (5); and moving the two seats (4, 5) in relation to each other so as to move the first seat (4) away from the second seat (5) and restore the two seats (4, 5) to the parted position; characterized by comprising the further step of moving the two seats (4, 5) in relation to each other and back into the mating position, so that the product (6) is engaged by the first seat (4), to perform a second operation on the product (6).
2. A method as claimed in Claim 1, characterized by comprising the further steps of transferring the product (6) from the second (5) to the first (4) seat when the two seats (4, 5) are once more in the mating position; retaining the product (6) inside the first seat (4); and moving the two seats (4, 5) back into the parted position.
3. A method as claimed in Claim 1 or 2, characterized in that said two seats (4, 5) are moved in a second direction (43), substantially perpendicular to said first direction (7), and along a substantially common path (P3) in the course of said relative displacements of the two seats (4, 5) and said two operations.
4. A method as claimed in one of the foregoing Claims, characterized in that said first and said second operation involve mating the product (6) with at least one sheet element (36; 55, 56).
5. A method as claimed in Claim 4, characterized in that said sheet element is a sheet (36) of wrapping material, which is fed between the two seats (4, 5) when the seats (4, 5) are in the parted position; said operations being wrapping operations for folding said sheet (36) about the product (6) and forming, in two successive steps, a tubular wrapping (35) about the product (6).
6. A method as claimed in Claim 5, characterized in that said seats (4, 5) are substantially U-shaped; said first operation comprising folding said sheet (36) so as to obtain a sheet (36) folded substantially into a U about the product (6); said U-folded sheet (36) being obtained by at least partly inserting the product (6) and the sheet (36) inside the second seat (5) as said two seats (4, 5) are moved into the mating position.
7. A method as claimed in Claim 6, characterized in that a portion (40) of said U-folded sheet (36) projects from the second seat (5) substantially in said first direction (7); said portion (40) of the sheet (36) being folded in a second direction (43) substantially perpendicular to the first direction (7), and at least partly onto the product (6) by external folding means (42) movable in relation to said two seats (4, 5), when the product (6) is housed in said second seat (5) and the two seats (4, 5) are in the parted position.
8. A method as claimed in Claim 7, characterized in that, upon said portion (40) of the sheet being folded onto the product (6) by said folding means (42), an end portion (44) of said portion (40) of the sheet projects from the product (6) in said second direction (43); said second operation comprising folding said end portion (44) in said first direction (7) and onto the product (6) to obtain said tubular wrapping (35); said end portion (44) being folded by at least partly inserting the product (6) and the sheet (36) inside the first seat (4) as said two seats (4, 5) are moved into the mating position.
9. A method as claimed in Claim 4, characterized in that said sheet element (55, 56) is a label (55; 56), which is fed between the two seats (4, 5) when the seats (4, 5) are in the parted position.

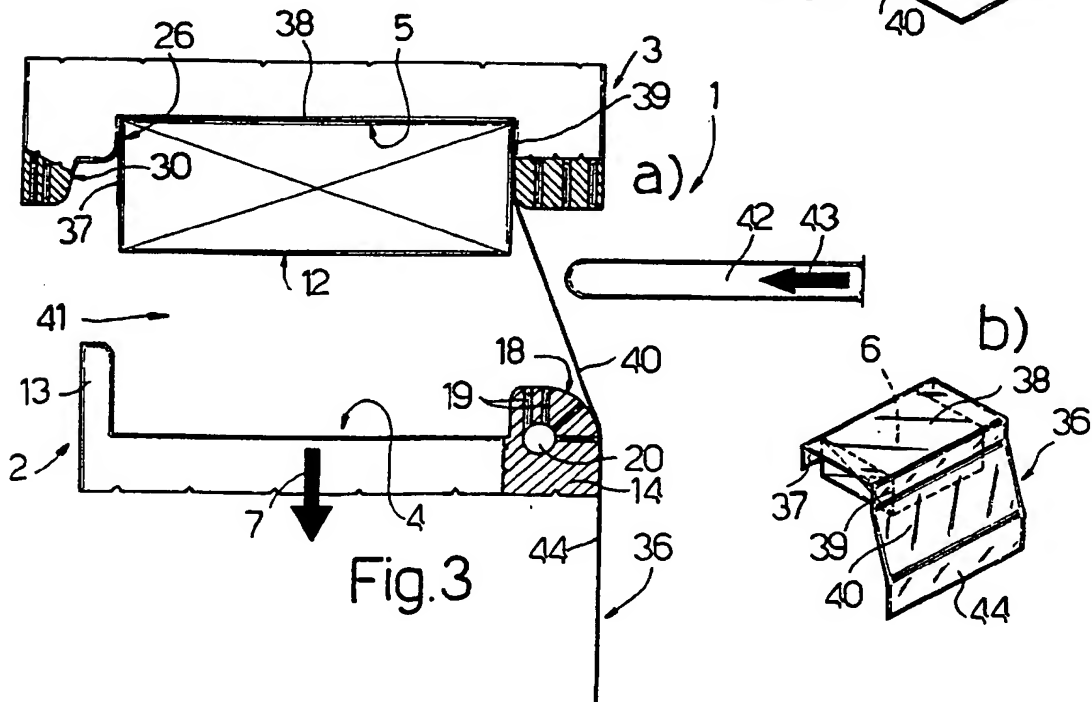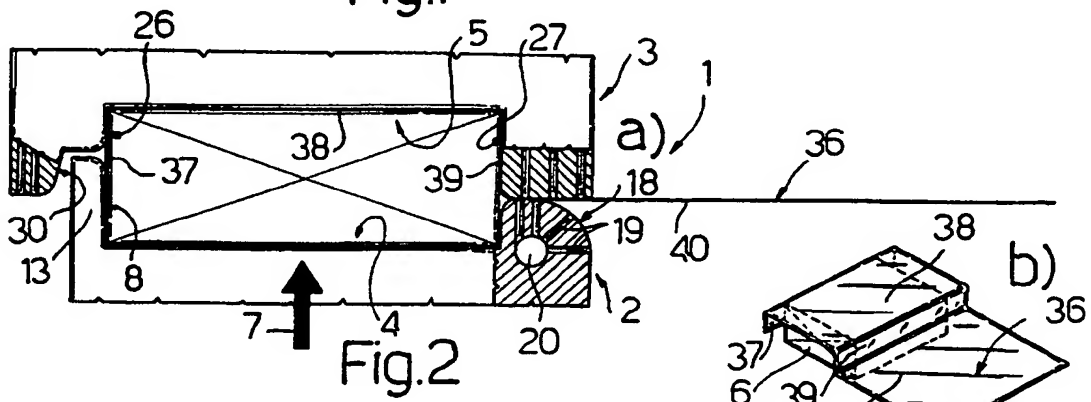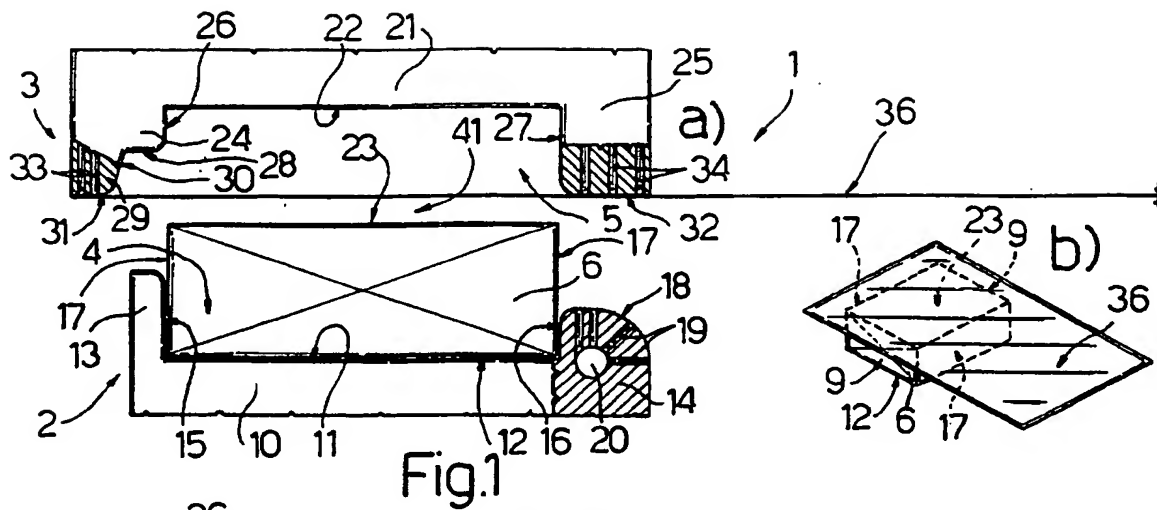

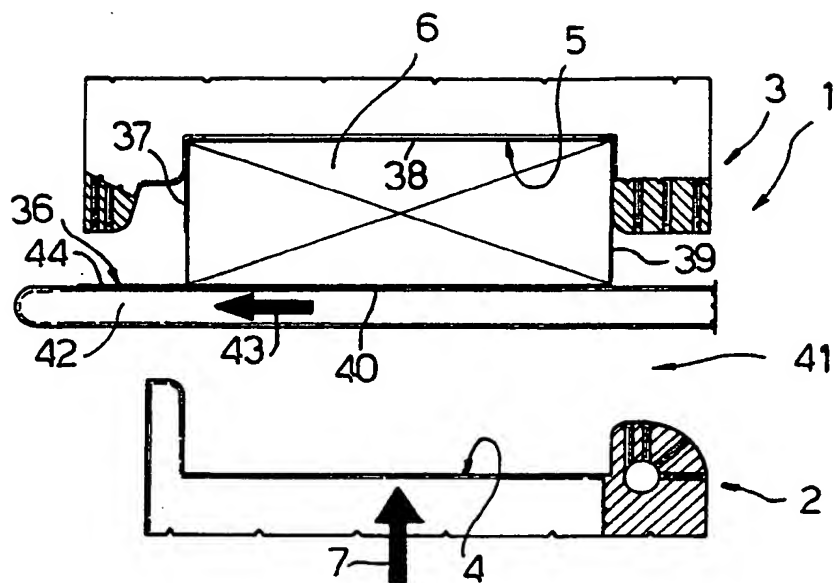


Fig. 4

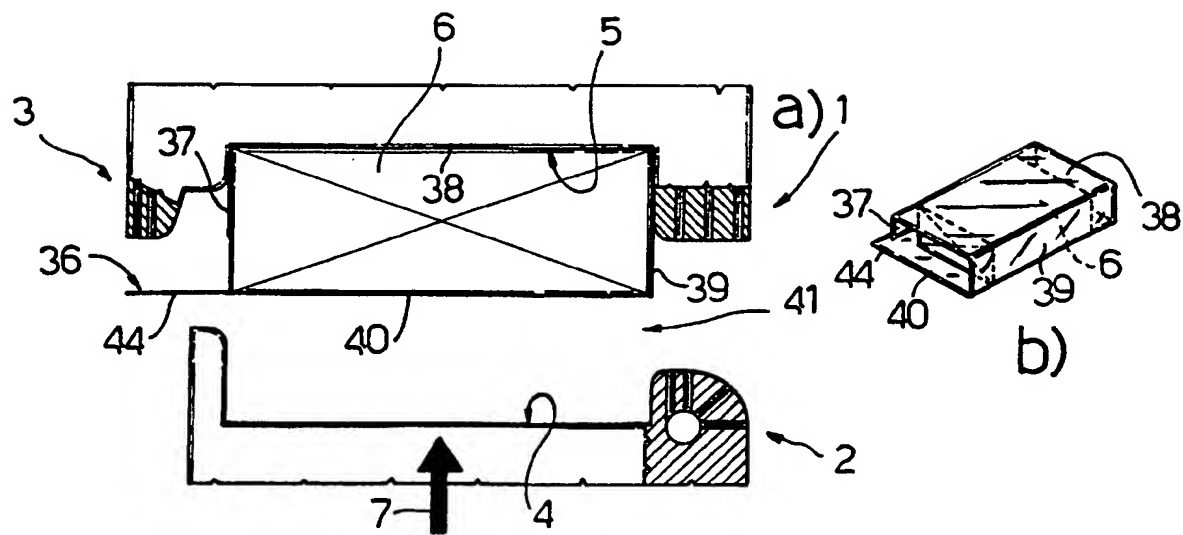
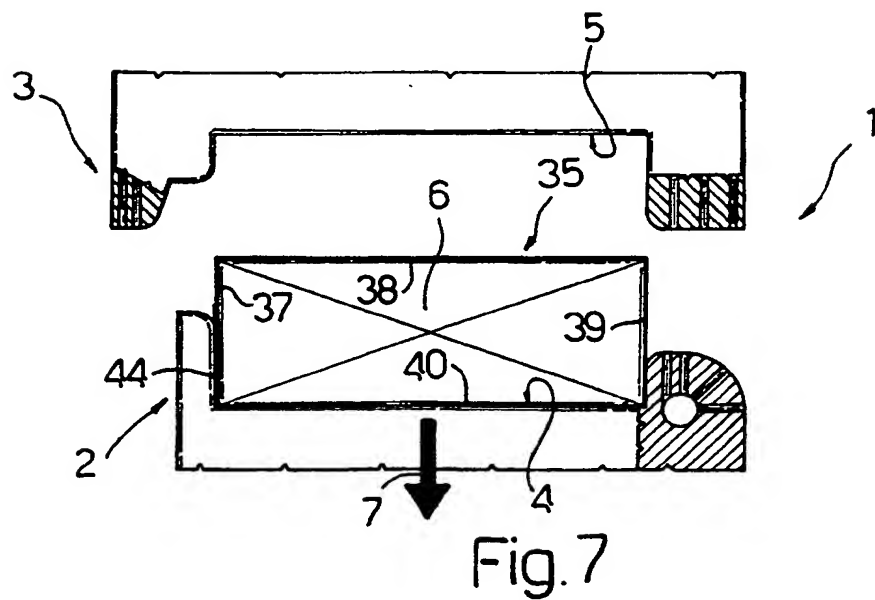
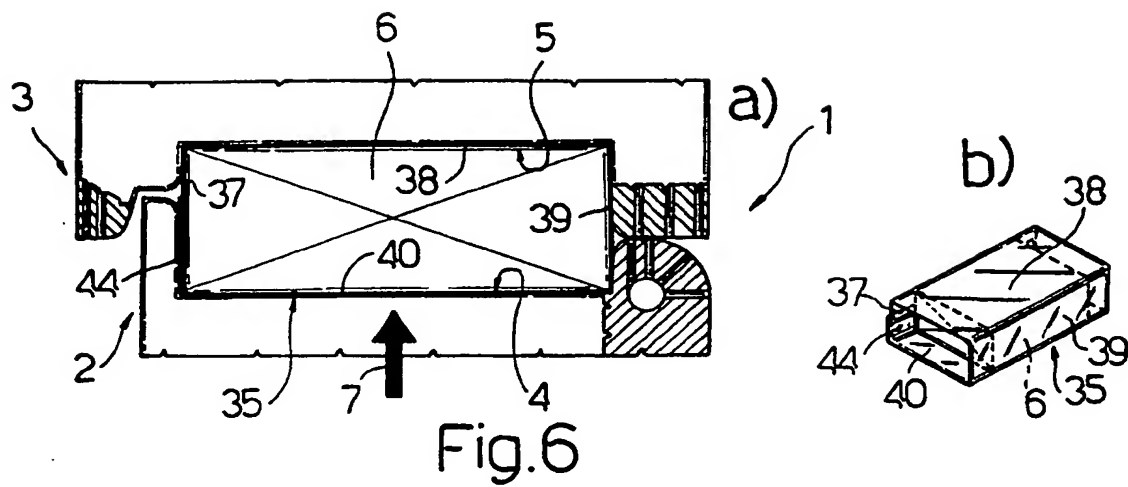
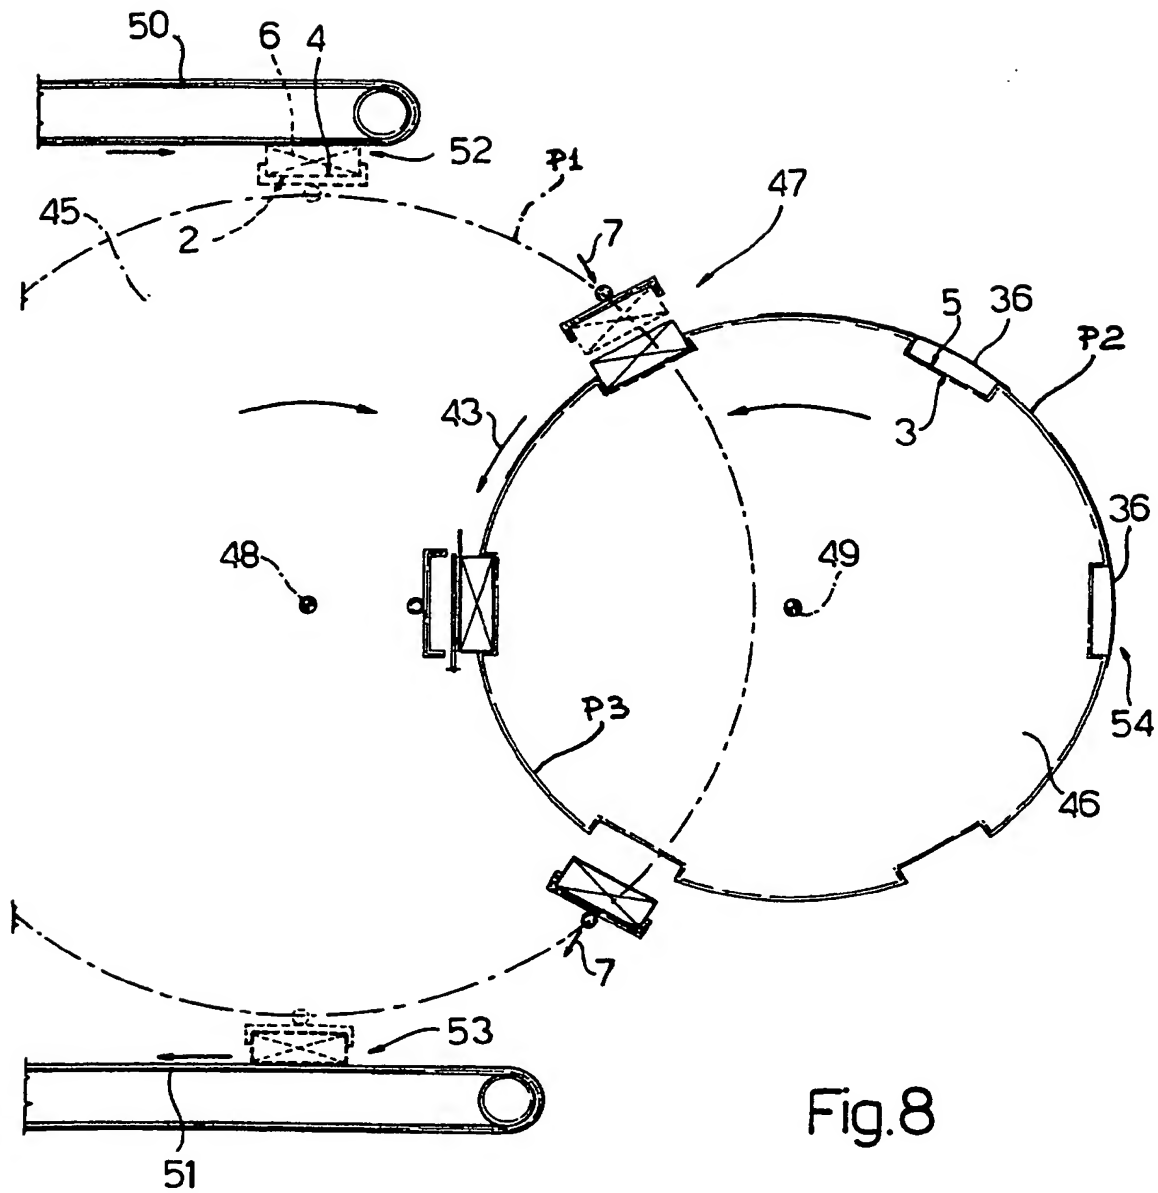


Fig. 5





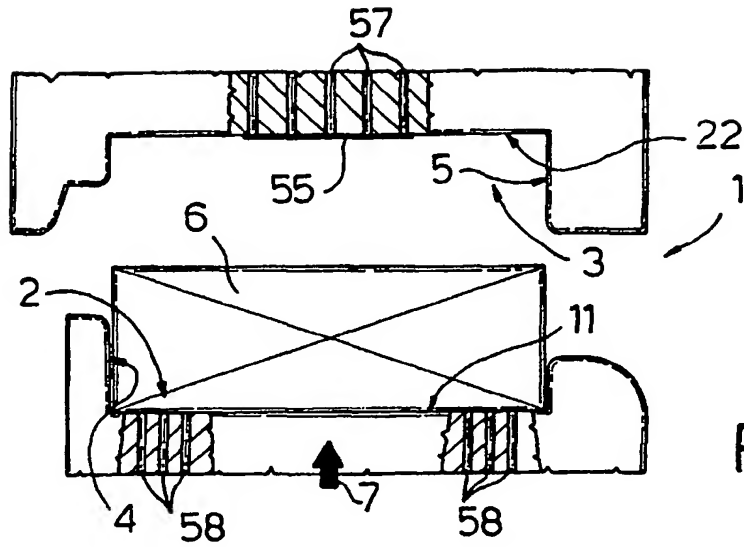


Fig.9

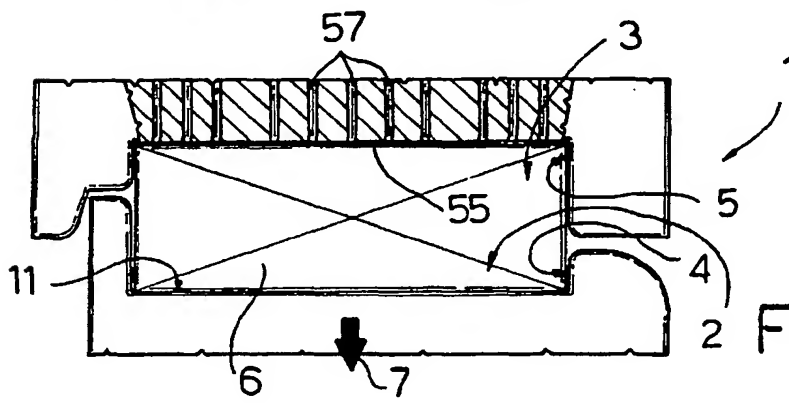


Fig.10

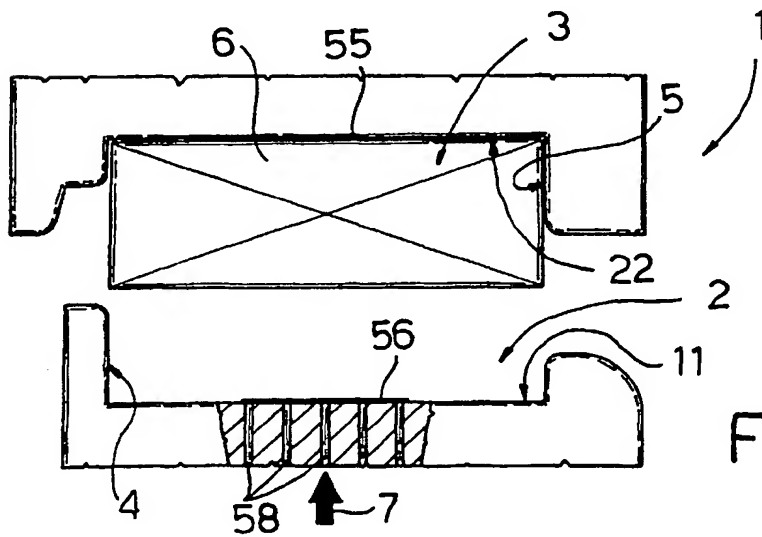


Fig.11



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 10 7370

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	GB 2 191 166 A (NAGEMA) * the whole document * -----	1	B65B19/22 B65B11/30
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			B65B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 7 August 1997	Examiner Claeys, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01.02 (P64C01)



P.B.5818 - Patentlaan 2
2280 HV Rijswijk (ZH)
☎ +31 70 340 2040
TX 31651 epo nl
FAX +31 70 340 3016

Europäisches Patentamt

Zweigstelle
in Den Haag
Recherchen-
abteilung


European Patent Office

Branch at
The Hague
Search
division

Office européen des brevets

Département à
La Haye
Division de la
recherche

Jorio, Paolo, Dr. Ing.
Studio Torta S.r.l.,
Via Viotti, 9
10121 Torino
ITALIE

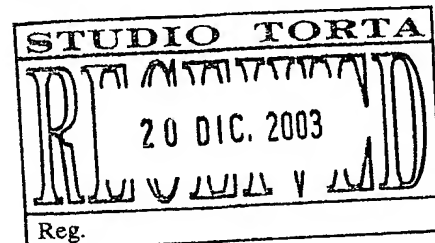

Datum/Date

22.12.03

Zeichen/Ref./Réf.

E-1818-03

Anmeldung Nr./Application No./Demande n°/Patent Nr./Patent No./Brevet n°.

03103330.1-2308-

Anmelder/Applicant/Demandeur/Patentinhaber/Proprietor/Titulaire

G.D Societa' Per Azioni

COMMUNICATION

The European Patent Office herewith transmits as an enclosure the European search report for the above-mentioned European patent application.

If applicable, copies of the documents cited in the European search report are attached.

☐ Additional set(s) of copies of the documents cited in the European search report is (are) enclosed as well.

The following specifications given by the applicant have been approved by the Search Division:

☒ abstract

☒ title

☐ The abstract was modified by the Search Division and the definitive text is attached to this communication.

The following figure will be published together with the abstract: 5

REFUND OF THE SEARCH FEE

If applicable under Article 10 Rules relating to fees, a separate communication from the Receiving Section on the refund of the search fee will be sent later.





DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 970 885 A (GD SPA) 12 January 2000 (2000-01-12) * column 4, line 44 - column 5, line 48; figures *	1,12	B65B19/22 B65B43/18 B65B43/10
A	DE 15 11 585 A (FOCKE PFUHL VERPACK AUTOMAT) 11 September 1969 (1969-09-11) * page 9, line 1 - page 12, line 14; figures *	1,12	
A	EP 0 806 350 A (GD SPA) 12 November 1997 (1997-11-12) * column 5, line 21 - column 6, line 50; figures *	1,12	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B65B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 12 December 2003	Examiner Jagusiak, A
CATEGORY OF CITED DOCUMENTS			
<div>X : particularly relevant if taken alone</div> <div>Y : particularly relevant if combined with another document of the same category</div> <div>A : technological background</div> <div>O : non-written disclosure</div> <div>P : intermediate document</div> <div>T : theory or principle underlying the invention</div> <div>E : earlier patent document, but published on, or after the filing date</div> <div>D : document cited in the application</div> <div>L : document cited for other reasons</div> <div>& : member of the same patent family, corresponding document</div>			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 10 3330

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-12-2003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0970885	A	12-01-2000	IT	B0980413 A1	07-01-2000
			EP	0970885 A1	12-01-2000
			US	6101787 A	15-08-2000
<hr/>					
DE 1511585	A	11-09-1969	DE	1511585 A1	11-09-1969
<hr/>					
EP 0806350	A	12-11-1997	IT	B0960239 A1	06-11-1997
			DE	69720843 D1	22-05-2003
			EP	0806350 A1	12-11-1997
			US	5822948 A	20-10-1998
<hr/>					